

# Light Box VW+C

2 sizes available:


- LED Light Box Small VW+C – max 100W
- LED Light Box Medium VW+C– Max 170W



**SMALL**

The Light Boxes VW+C Small and Medium are innovative products made to allow existing lantern or old Lamp Houses to utilize a LED super contained device to operate similarly and, therefore, be able to mix with all of the professional LED lighting fixtures in the De Sisti catalog

The Head can be remoted from the driver up to 10m with optional extension cable (standard supplied: 6m length)  
Thanks to such a product it's now possible to retrofit existing architectural fittings, lampposts, chandeliers and so forth with the VW+Color De Sisti Technology

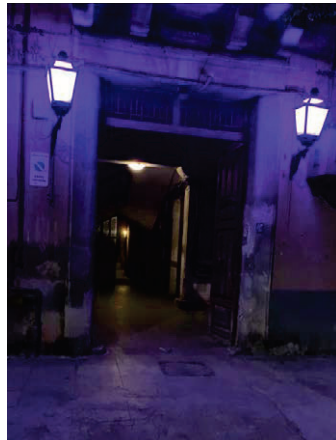

**APPLICATION  
INSIDE OLD  
LANTERNS**

**MEDIUM**



LIGHT BOX VW+C		
Model	SMALL	MEDIUM
<b>Power to LED</b>	max 100W - DC current to the LED - flicker free	max 170W - DC current to the LED - flicker free
<b>Rated Voltage &amp; PFC</b>	90-250V 50-60Hz PFC 0.96	
<b>Power consumption</b>	max 115W	max 190W
<b>Power Connection</b>	powerCON IN & OUT	
<b>DMX Data link USITT DMX512-A</b>	5-pin XLR for DMX in & out. RDM control . Wireless DMX available on request (TIMO TWO) Use shielded data cables. Do not overload the daisy chain. Up to a maximum of 32 devices can be used on a single DMX chain.	
<b>DMX Channels</b>	8 / 9- 12/13 or 39/40 - DMX chart for details	
<b>LED BOARDS Lifetime</b>	60.000 hours with 70% Lumen Maintenance. The LED BOARDS are tested and certified up to LM80	
<b>CCT</b>	Tunable from 1.800°K to 12.000°K + RGBA color and color correction mode	
<b>CRI / TLCI</b>	>95 / >96	
<b>Protection Type</b>	IP20	
<b>Dimension</b>	130 x 120 x 100 mm   5.1 x 4.7 x 3.9 inches	160 x 145 x 100 mm   6.3 x 5.7 x 3.9 inches
<b>Ambient operating Temperature</b>	-20° C to +40°C (-4° to 104°F)	